



DRACO
SAILING HARDWARE

Attachment Instructions

Product: SSL

Draco stainless steel soft loop sailing block





1. Remove both bolts from the side plate.




2. Remove one side plate from the block.




3. Push the black inner part out of the steel inner race until you can see the centre pin.




4. Push the centre pin out half way.

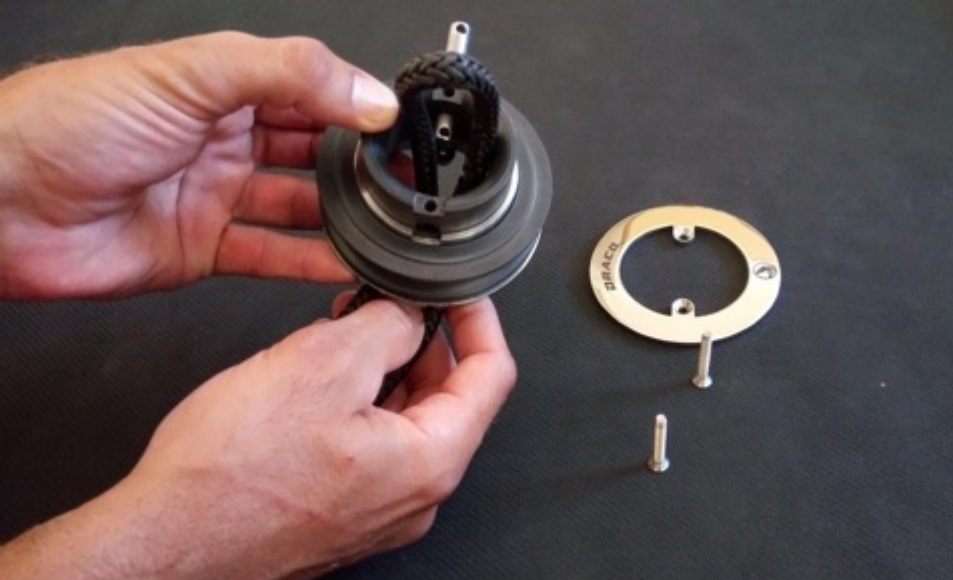


5. Insert the soft loop from below.

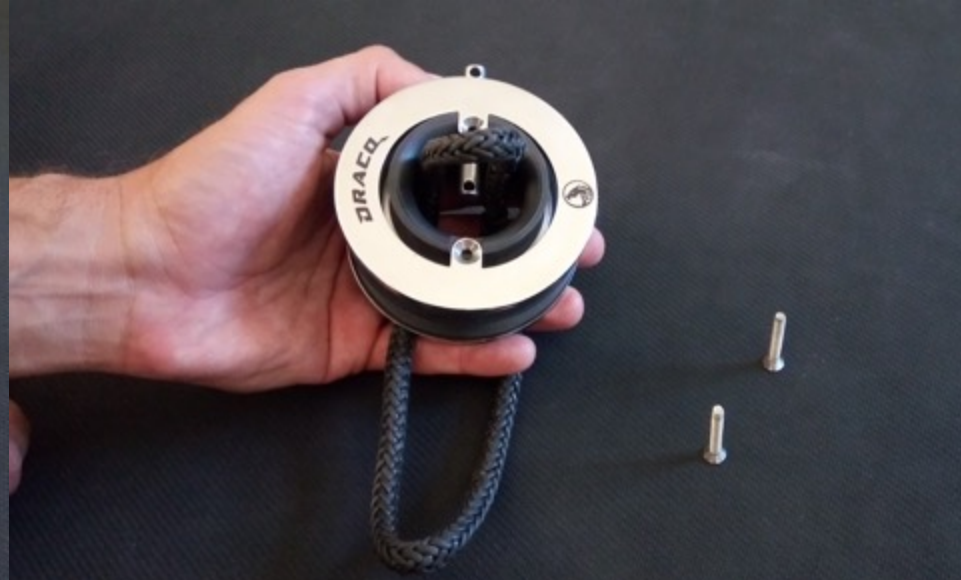


6. Place the side wall back into position. Do not move the black inner part yet.

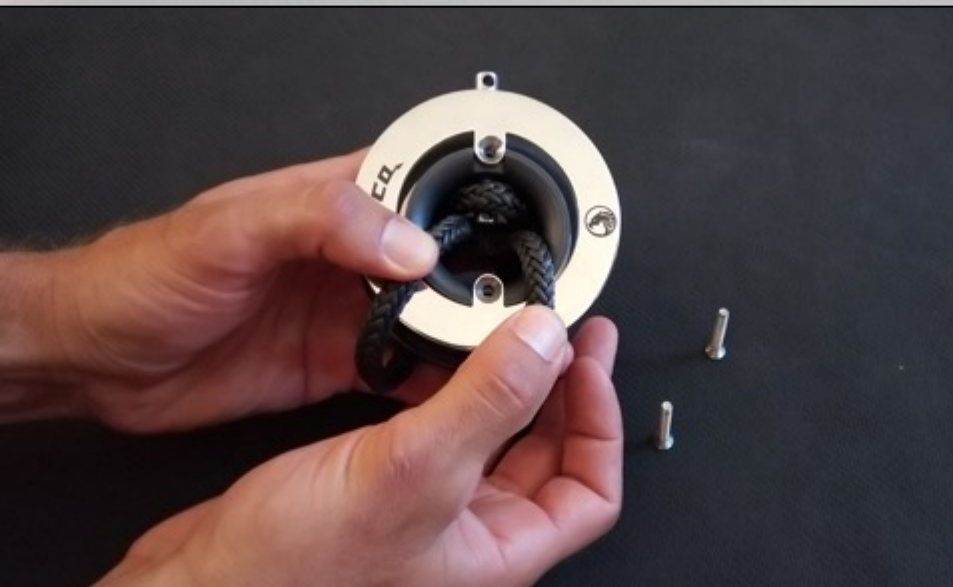

7. Loop the other end of the soft loop around the block and insert it into the block centre.

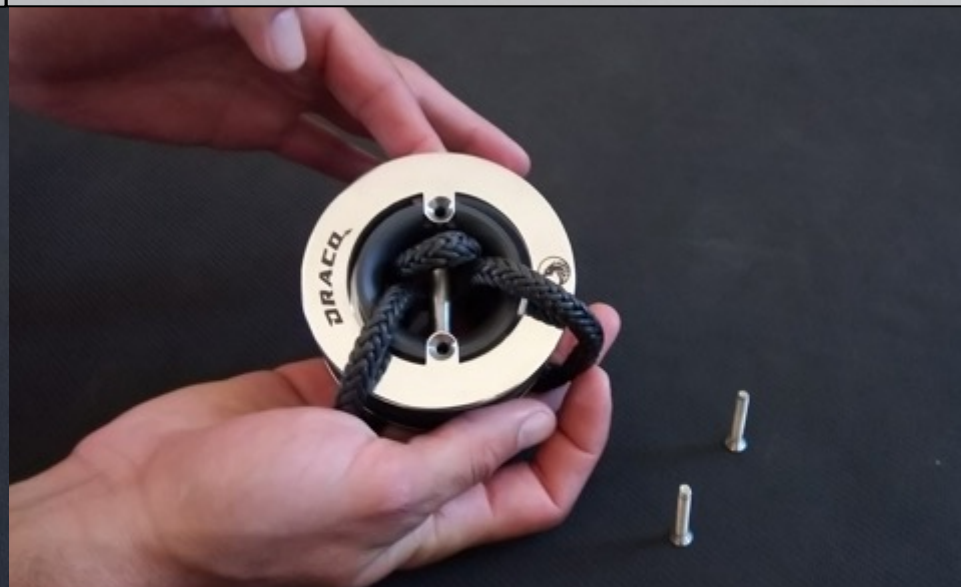


8. Push the centre pin back into position, through both ends of the soft loop.

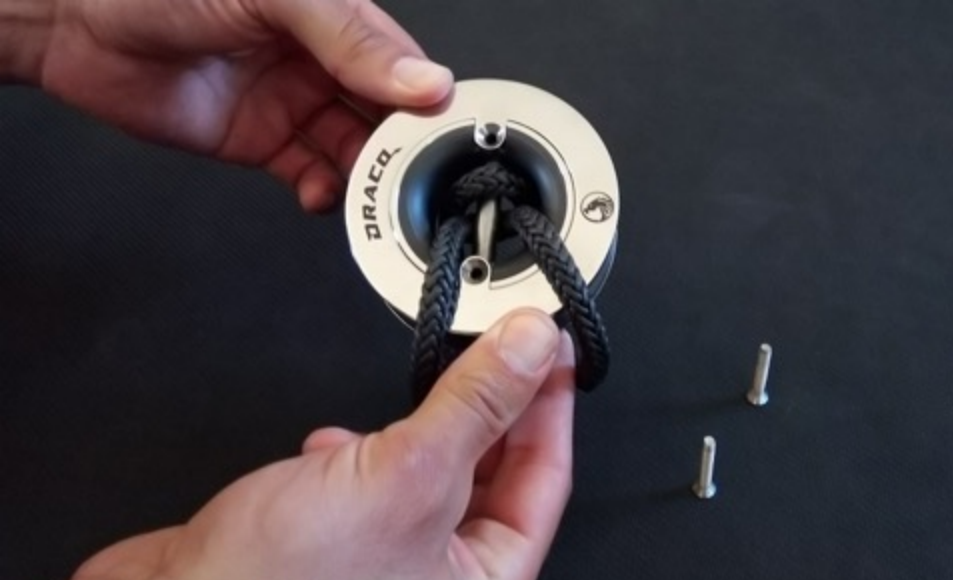

9. Push the black inner part back into position. Place the side wall back into position.



10. Insert and fasten both bolts.

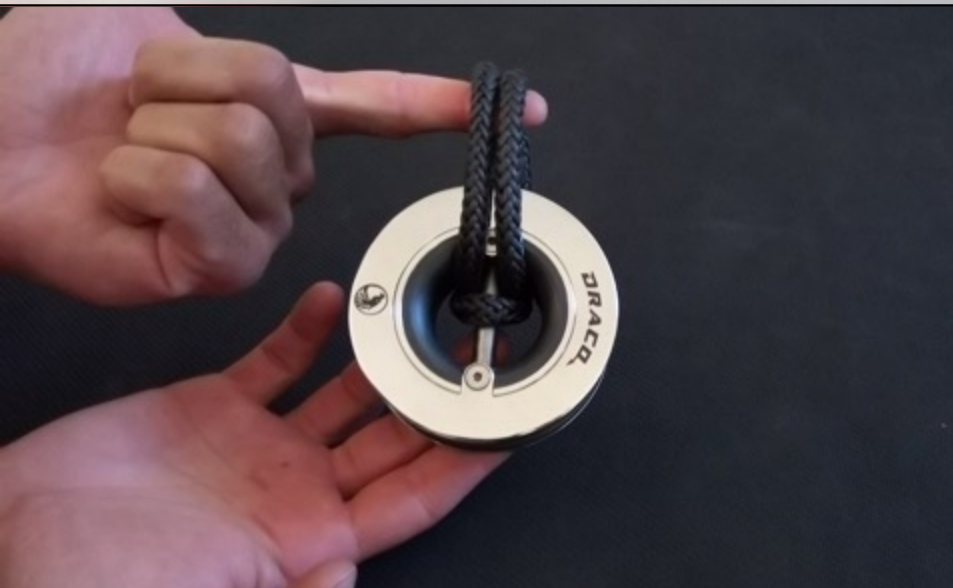

11. And done!



A. You can also bypass the pin.



B. But do not load the pin in the manner above.